



2021.P02



JINYU TIRE GROUP

HQ Add: 10th Floor, Block A, Platinum Plaza, No.5 Wenling Road, Laoshan District, Qingdao, China

Tel No.: 0086-400-600-7809

E-mail: TBR2@jinyutires.com

Website: www.blackliontires.cn

Long Haul/Regional/On & Off Road/Off Road/Urban

TRUCK&BUS TIRES CATALOG 2022

Jinyu firmly adheres to the enterprise spirit, "Common benefit is above all" and the company's target of "Providing the customers with excellent quality products and a high level of service." We insist on focusing on our customer's demands, committing to our promises, operating ethically, and developing scientifically to maximize the common benefit of consumers, distributors, suppliers, employees, shareholders, communities, governments, enterprises and other related parties.

"Common benefit is above all"!

ENTERPRISE VISION

BLACKLION

TRUCK & BUS TIRE

Long Haul / Regional / On&Off Road / Off Road / Urban



To be the best tire supplier, trusted globally and able to provide the best value and experience to customers and end-users.

ENTERPRISE MISSION

Concentrate on rubber tire technology and service development and application;
Commit ourselves to providing customers the best value and experience.



ENTERPRISE INTRODUCTION

Enterprise Profile

JINYU Tire Group Co., Ltd. was founded in 1995, which is a professional tire R & D and manufacturing enterprise. The company has total assets of 5.5billion Yuan and there are more than 3500 employees. By equipped with advanced tire production, research and development, testing equipment and professional technology, management team, the company has established a sound quality management system. There are two plants respectively located in China and Vietnam with total capacity of 6 million pcs/year. The company has set up sales centers in North America, Europe, Vietnam and other countries in local operation. The sales network covers more than 100 countries and regions in the Middle East, Asia, Europe, the United States, Africa and so on.

Jinyu Certificates

The company has obtained certificates like CCC, DOT, ECE, INMETRO, ISO/TS16949, GCC, SONCAP, TBS, SARS and so on. The company's laboratory has been certified by CNAS and ISO/IEC 17025 and obtained many national Patents.

Research and Development

The company believes proving excellent quality is a way of life and takes every opportunity to instill this value throughout the entire enterprise. As proof of this commitment, a considerable investment has been made in R&D over the last 20 years. The R&D center not only utilizes advanced equipment but also commits to having efficient operations and maintaining a strong teamwork culture. The team is hyper-focused on marketing, product planning, formula research and development, as well as, structure design and product testing.

CONTENTS

06 BF188	07 BT165	09 BT168	10 BF155	11 BD175	34 BA226	35 BA111	36 BA115	37 BLR01	38 BA122
12 BD176	13 BD177	14 BD165	15 BD186	16 BD187/BD187II	39 BA125	40 BA220	41 BA106	42 BA127	43 BA105
17 BD170	18 BD171	19 BD173	20 BT188	21 BT107		45 BD285	46 BD189	47 BD266	48 BD270
22 BT160	23 BT180	24 BT161	26 BD218	27 BD210		49 BLM16	51 BC121	53 BU123	54 BU551
28 BD280	29 BD260	30 BD216	31 BLG19	33 BA267			55 BLC58	56 BW290	56 BW290



BLACKLION PATTERN REFERENCE




Vehicle / Road	Long Haul	Regional	On & Off Road	Off Road	Coach & Urban
Steer	<p>06 BF188 07 BT165 09 BT168 10 BF155</p>	<p>11 BD175 15 BD186 16 BD187 19 BD173 & II</p>	<p>26 BD218 27 BD210 28 BD280</p>		
Drive	<p>12 BD176 13 BD177 14 BD165</p> <p>17 BD170 18 BD171</p>	<p>11 BD175 15 BD186 16 BD187 19 BD173</p>	<p>26 BD218 27 BD210 28 BD280</p> <p>29 BD260 30 BD216 31 BLG19</p>		
Trailer	<p>21 BT107</p>	<p>20 BT188 22 BT160 23 BT180 24 BT161</p>			
All-position	<p>41 BA106 57 BW290 58 BW291</p>	<p>33 BA267 34 BA226 35 BA111 36 BA115</p> <p>38 BA122 39 BA125 42 BA127 43 BA105</p>	<p>37 BLR01 40 BA220</p>	<p>45 BD285 46 BD189 47 BD266</p> <p>48 BD270 49 BLM16</p>	<p>51 BC121 53 BU123</p> <p>54 BU551 55 BLC58</p>

ALL STEEL RADIAL TIRE



The Flat Distribution FEA Technology is adopted to control the deformation of tire carcass and belt layer, reducing the energy lag loss caused by tire deformation, optimizing rolling resistance, and saving the fuel consumption by 3-5% per 100km.

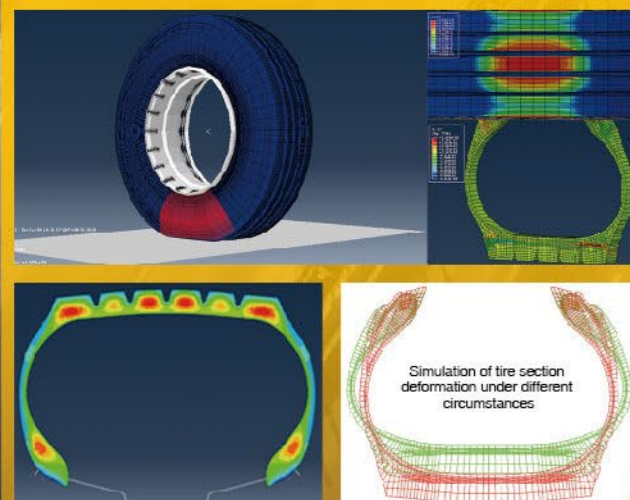

• suitable




BF188

Suitable Conditions

Medium and long mileage truck running on paved and highway roads

- ✓ High wear resistance
- ✓ Long tread life
- ✓ Economical and green
- ✓ Good cost-performance

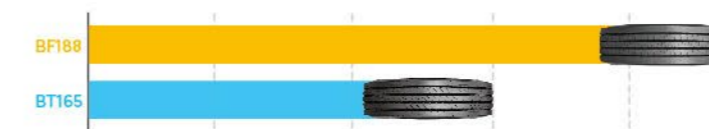

The adoption of Flat Distribution FEA Technology enables BF188 better rolling resistance (5% lower than BT165). Optimized outline design assure superb wear performance, providing longer mileage.



According to the theoretical wear volume calculation, compared with the actual performance of BT165. The mileage of BF188 is expected to increase by 15%.



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
•	11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	16.5	1054	279
•	12R22.5	18	152/149 L	9.00	3550	3250	7830	7160	930	930	135	135	17	1085	300
•	11R24.5	14	146/143 L	8.25	3000	2725	6610	6005	720	720	105	105	16.5	1104	279
•	11R24.5	16	149/146 L	8.25	3250	3000	7160	6610	830	830	120	120	16.5	1104	279
•	205/75R17.5	14	124/122 M	6.00	1600	1500	3525	3315	750	750	110	110	13	753	204
•	215/75R17.5	16	135/133 L	6.00	2180	2060	4805	4540	860	860	125	125	12.5	767	211
•	235/75R17.5	18	143/141 L	6.75	2725	2575	6005	5675	860	860	125	125	13	797	233
•	245/70R17.5	16	136/134 M	7.50	2240	2120	4940	4675	850	850	123	123	13.5	789	248
•	225/70R19.5	14	128/126 L	6.75	1800	1700	3970	3750	760	760	110	110	12.5	811	226
•	245/70R19.5	18	144/142 J	7.50	2800	2650	6175	5840	900	900	130	130	13	839	248
•	265/70R19.5	18	143/141 J	7.50	2725	2575	6005	5675	900	900	130	130	13.5	867	262
•	285/70R19.5	18	150/148 K	8.25	3350	3150	7390	6945	900	900	130	130	14.5	895	283
•	255/70R22.5	16	140/137 M	7.50	2500	2300	5510	5070	830	830	120	120	12.5	930	255
•	275/70R22.5	16	148/145 M	8.25	3150	2900	6940	6395	900	900	130	130	15	958	276
•	275/70R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	16	958	276
•	275/80R22.5	18	149/146 L	8.25	3250	3000	7160	6610	900	900	130	130	16	1012	276
•	295/60R22.5	18	150/147 L	9.00	3350	3075	7390	6780	900	900	130	130	15	926	292
•	295/75R22.5	14	144/141 L	9.00	2800	2575	6175	5675	760	760	110	110	16.5	1014	298
•	295/75R22.5	16	146/143 L	9.00	3000	2725	6610	6005	830	830	120	120	16.5	1014	298
•	295/80R22.5	18	152/149 M	9.00	3550	3250	7825	7165	900	900	130	130	16	1044	298
•	315/60R22.5	18	152/148 L	9.75	3550	3150	7825	6945	900	900	130	130	14.5	950	313
•	315/70R22.5	18	156/150 L	9.00	4000	3350	8820	7385	900	900	130	130	15.5	1014	312
•	315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	17	1076	312
•	285/75R24.5	14	144/141 L	8.25	2800	2575	6175	5675	760	760	110	110	16.5	1050	283
•	285/75R24.5	16	147/144 L	8.25	3075	2800	6780	6175	830	830	120	120	16.5	1050	283

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BT165

Suitable Conditions

Medium and long mileage trucks running on paved and highway roads



- High wear resistance
- Long tread life
- Economical and green
- Good cost-performance



● suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
●	8.5R17.5	12	121/120 M	6.00	1450	1400	3195	3085	625	625	90	90	11	802	215
●	9.5R17.5	18	143/141 J	6.75	2725	2575	6005	5675	875	875	125	125	13.5	842	240
●	10R22.5	16	144/142 L	7.50	2800	2650	6175	5840	900	900	130	130	14.5	1020	254
●	11R22.5	16	148/145 M	8.25	3150	2900	6945	6395	840	840	120	120	17	1054	279
●	12R22.5	18	152/149 L	9.00	3550	3250	7825	7165	930	930	135	135	17	1085	300
●	13R22.5	18	154/151 K	9.75	3750	3450	8270	7605	830	830	120	120	17	1124	320
●	9R22.5	14	136/134 M	6.75	2240	2120	4940	4675	830	830	120	120	13.5	974	229
● ●	205/75R17.5	14	124/122 M	6.00	1600	1500	3525	3315	750	750	110	110	13	753	204
● ●	215/75R17.5	16	135/133 L	6.00	2180	2060	4805	4540	860	860	125	125	12.5	767	211
● ●	235/75R17.5	18	143/141 L	6.75	2725	2575	6005	5675	860	860	125	125	12.5	797	233
●	245/70R17.5	16	136/134 M	7.50	2240	2120	4940	4675	850	850	123	123	13	789	248
●	245/70R17.5	18	134/132 L	7.50	2120	2000	4675	4410	900	900	130	130	13	789	248
●	225/70R19.5	14	128/126 L	6.75	1800	1700	3970	3750	760	760	110	110	12.5	811	226
●	245/70R19.5	16	136/134 M	7.50	2240	2120	4940	4675	830	830	120	120	13	839	248
●	245/70R19.5	18	144/142 J	7.50	2800	2650	6175	5840	900	900	130	130	13	839	248

Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
●	265/70R19.5	16	140/138 M	7.50	2500	2360	5510	5205	760	760	110	110	13.5	867	262
●	265/70R19.5	18	143/141 J	7.50	2725	2575	6005	5675	900	900	130	130	13.5	867	262
●	285/70R19.5	18	150/148 K	8.25	3350	3150	7390	6945	900	900	130	130	13	895	283
●	255/70R22.5	16	140/137 M	7.50	2500	2300	5510	5070	830	830	120	120	13.5	930	255
●	275/70R22.5	16	148/145 M	8.25	3150	2900	6940	6395	900	900	130	130	14.5	958	276
●	275/70R22.5	18	148/145 M	8.25	3150	2900	6940	6395	900	900	130	130	14.5	958	276
●	295/60R22.5	18	150/147 L	9.00	3350	3075	7390	6780	900	900	130	130	14.5	926	292
● ●	295/80R22.5	16	152/148 M	9.00	3550	3150	7825	6945	850	850	125	125	16	1044	298
● ●	295/80R22.5	18	152/149 M	9.00	3550	3250	7825	7165	900	900	130	130	16	1044	298
● ●	295/80R22.5	18	154/149 M	9.00	3750	3250	8270	7160	850	850	125	125	16	1044	298
●	315/60R22.5	18	152/148 L	9.75	3550	3150	7825	6945	900	900	130	130	14.5	950	313
● ●	315/70R22.5	18	156/150 L	9.00	4000	3350	8820	7385	900	900	130	130	15.5	1014	312
● ●	315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	17	1076	312
●	325/95R24	22	162/160 K	9.00	4750	4500	10500	9920	850	850	123	123	15	1228	325

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BT168


Suitable Conditions

Medium and long mileage truck running on paved and highway roads



- High wear resistance
- Long tread life
- Economical and green
- Good cost-performance



 suitable



BF155


Suitable Conditions

Long mileage trucks and passenger busses running on paved and highway roads



- High wear resistance
- Long tread life
- Economical and green
- Good cost-performance



 suitable



Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
CN VN	12R22.5	18	152/149 L	9.00	3550	3250	7825	7165	930	930	135	135	16	1085	300

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
CN VN	12R22.5	18	152/149 L	9.00	3550	3250	7830	7160	930	930	135	135	14.5	1085	300
	235/75R17.5	18	143/141 L	6.75	2725	2527	6005	5675	860	860	125	125	13	797	233

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD175


Suitable Conditions

Medium and long mileage trucks running on paved and highway roads



- Excellent traction
- High wear resistance
- Tread chunking resistance



 suitable



BD176


Suitable Conditions

Medium vehicles running on paved roads



- Excellent grip
- Strong braking traction performance
- Excellent durability



 suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
• •	11R22.5	16	148/145	L	8.25	3150	2900	6940	6395	850	850	123	123	20	1059	279
• •	12R22.5	18	152/149	K	9.00	3550	3250	7825	7165	930	930	135	135	20	1096	300
• •	12R22.5	18	152/149	L	9.00	3550	3250	7830	7160	930	930	135	135	20	1096	300
•	13R22.5	18	154/151	K	9.75	3750	3450	8270	7605	830	830	120	120	20.5	1124	320
• •	205/75R17.5	14	124/122	L	6.00	1600	1500	3525	3315	750	750	110	110	15	753	204
• •	215/75R17.5	16	135/133	L	6.00	2180	2060	4805	4540	860	860	125	125	15	767	211
• •	235/75R17.5	18	143/141	L	6.75	2725	2575	6005	5675	860	860	125	125	15	797	233
•	225/70R19.5	14	128/126	L	6.75	1800	1700	3970	3750	760	760	110	110	15	817	226
• •	245/70R19.5	18	144/142	J	7.50	2800	2650	6175	5840	900	900	130	130	15.5	839	248
•	265/70R19.5	18	143/141	J	7.50	2725	2575	6005	5675	900	900	130	130	15.5	867	262
•	255/70R22.5	16	140/137	L	7.50	2500	2300	5510	5070	830	830	120	120	15.5	930	255
•	^{INDUSTRY} 275/80R22.5	16	146/143	L	8.25	3000	2725	6610	6005	830	830	120	120	22	1012	276
• •	295/80R22.5	18	152/149	M	9.00	3550	3250	7825	7165	900	900	130	130	22	1044	298
• •	315/70R22.5	18	156/150	L	9.00	4000	3350	8820	7385	900	900	130	130	20	1014	312
• •	315/80R22.5	20	156/153	L	9.00	4000	3650	8820	8045	850	850	125	125	23	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	315/80R22.5	20	156/153	L	9.00	4000	3650	8820	8045	850	850	125	125	19.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD177

Suitable Conditions

Medium and long mileage vehicles running on paved roads



☑ Long tread life
Super wide and wear resistant tread provides a longer tread life for longer travel (an extra 20% compared to the original).



● suitable



BD165

Suitable Conditions

Medium and long mileage vehicles running on paved roads



☑ Long tread life
Super wide and wear resistant tread provides a longer tread life for longer travel (an extra 20% compared to the original).



● suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	265/70R19.5	18	143/141	J	7.50	2725	2575	6005	5675	900	900	130	130	15.5	867	262
•	285/70R19.5	18	150/148	K	8.25	3350	3150	7390	6945	900	900	130	130	16	895	283
•	275/70R22.5	16	148/145	M	8.25	3150	2900	6940	6395	900	900	130	130	18	958	276
•	295/60R22.5	18	150/147	L	9.00	3350	3075	7390	6780	900	900	130	130	18	926	292
•	295/80R22.5	18	152/149	L	9.00	3550	3250	7825	7165	900	900	130	130	19	1044	298
•	315/60R22.5	18	152/148	L	9.75	3550	3150	7825	6945	900	900	130	130	18	950	313
•	315/70R22.5	18	156/150	L	9.00	4000	3350	8820	7385	900	900	130	130	19	1014	312
•	315/80R22.5	20	156/153	L	9.00	4000	3650	8820	8045	850	850	125	125	20	1076	312

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	295/80R22.5	18	152/149	L	9.00	3550	3250	7825	7165	900	900	130	130	17	1044	298
•	315/70R22.5	18	156/150	L	9.00	4000	3350	8820	7385	900	900	130	130	18	1014	312
•	315/80R22.5	20	156/153	K	9.00	4000	3650	8820	8050	850	850	120	120	18	1076	312

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD186

Suitable Conditions

Medium and long mileage trucks running on paved and highway roads



- ✓ Excellent traction
- ✓ High wear resistance
- ✓ Tread chunking resistance



● suitable



BD187/BD187^{II}

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- ✓ Long tread life
Super wide and wear resistant tread provides a longer tread life for longer travel (an extra 20% compared to the original).



● suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	265/70R19.5	18	143/141	J	7.50	2725	2575	6005	5675	900	900	130	130	15.5	867	262
•	275/70R22.5	16	148/145	M	8.25	3150	2900	6945	6395	900	900	130	130	20	958	276

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	•12R22.5	18	152/149	K	9.00	3550	3250	7825	7165	930	930	135	135	20	1096	300
•	•295/80R22.5	18	152/149	L	9.00	3550	3250	7830	7160	900	900	130	130	20.5	1044	298

•12R22.5 applied to BD187^{II}, 295/80R22.5 applied to BD187

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD170

Suitable Conditions

Medium and long mileage truck running
on paved and highway roads



- Excellent traction
- Tread chunking resistance



suitable



BD171

Suitable Conditions

Medium and long mileage truck running
on paved and highway roads



- Excellent traction
- High wear resistance



suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	11R22.5	14	144/142	L	8.25	2800	2650	6175	5840	720	720	105	105	22.5	1059	279
•	11R22.5	16	146/143	L	8.25	3000	2725	6610	6005	830	830	120	120	22.5	1059	279
•	295/75R22.5	14	144/141	L	9.00	2800	2575	6175	5675	760	760	110	110	22.5	1020	298
•	295/75R22.5	16	146/143	L	9.00	3000	2725	6610	6005	830	830	120	120	22.5	1020	298

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	11R22.5	14	144/142	L	8.25	2800	2650	6175	5840	720	720	105	105	23.5	1059	279
•	11R22.5	16	146/143	L	8.25	3000	2725	6610	6005	830	830	120	120	23.5	1059	279
•	11R24.5	14	146/143	L	8.25	3000	2725	6610	6005	720	720	105	105	23.5	1110	279
•	11R24.5	16	149/146	L	8.25	3250	3000	7160	6610	830	830	120	120	23.5	1110	279
•	295/75R22.5	14	144/141	L	9.00	2800	2575	6175	5675	760	760	110	110	23.5	1020	298
•	295/75R22.5	16	146/143	L	9.00	3000	2725	6610	6005	830	830	120	120	23.5	1020	298
•	285/75R24.5	14	144/141	L	8.25	2800	2575	6175	5675	760	760	110	110	23.5	1056	283
•	285/75R24.5	16	147/144	L	8.25	3075	2800	6780	6175	830	830	120	120	23.5	1056	283

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD173

Suitable Conditions

Medium and long mileage truck running on paved and highway roads



- ✓ Excellent traction
- ✓ Tread chunking resistance



● suitable



BT188

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- ✓ Long tread life and great high speed stability
- ✓ Durable and wear-resistant sidewall
- ✓ Cool running
- ✓ Low noise emissions and reduced stone retention



● suitable



Origin CN VN	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	11R22.5	14	144/142	L	8.25	2800	2650	6175	5840	720	720	105	105	21.5	1059	279
•	11R22.5	16	146/143	L	8.25	3000	2725	6610	6005	830	830	120	120	21.5	1059	279
•	11R24.5	14	146/143	L	8.25	3000	2725	6610	6005	720	720	105	105	21.5	1110	279
•	11R24.5	16	149/146	L	8.25	3250	3000	7160	6610	830	830	120	120	21.5	1110	279
•	295/75R22.5	14	144/141	L	9.00	2800	2575	6175	5675	760	760	110	110	21.5	1020	298
•	295/75R22.5	16	146/143	L	9.00	3000	2725	6610	6005	830	830	120	120	21.5	1020	298
•	285/75R24.5	14	144/141	L	8.25	2800	2575	6175	5675	760	760	110	110	21.5	1056	283
•	285/75R24.5	16	147/144	L	8.25	3075	2800	6780	6175	830	830	120	120	21.5	1056	283

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin CN VN	Size	PR	LI/ SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)		
					(kgs)	(lbs)	(kPa)	(PSI)					
					•	•	435/50R19.5	20				160	J
•	•	445/45R19.5	20	160	J	15.00	4500	9920	900	130	13	895	446

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BT107

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- ✓ Long tread life
Super wide and wear resistant tread provides a longer tread life for longer travel (an extra 20% compared to the original).



● suitable



BT160

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- ✓ Long tread life and great high speed stability
- ✓ Durable and wear-resistant sidewall
- ✓ Cool running
- ✓ Low noise emissions and reduced stone retention



● suitable



Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	235/75R17.5	18	143/141	J	6.75	2725	2575	6005	5675	860	860	125	125	13	797	233
•	245/70R17.5	18	143/141	J	7.50	2725	2575	6005	5675	875	875	125	125	13	789	248
•	245/70R19.5	18	144/142	J	7.50	2800	2650	6175	5840	900	900	130	130	13.5	839	248

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin	Size	PR	LI/SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)	(lbs)	(kPa)	(PSI)				
					CN	VN						
•	385/55R22.5	20	160	K	12.25	4500	9920	900	130	14.5	996	386
•	385/65R22.5	20	160	K	11.75	4500	9920	900	130	15.5	1072	389
•	385/65R22.5	24	164	K	11.75	5000	11000	930	135	15.5	1072	389

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BT180

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- ✓ Long tread life and great high speed stability
- ✓ Durable and wear-resistant sidewall
- ✓ Cool running
- ✓ Low noise emissions and reduced stone retention



● suitable



BT161

Suitable Conditions

Medium and long mileage trucks running on paved roads and highways



- ✓ High wear resistance
- ✓ Low noise emissions
- ✓ Long tread life
- ✓ Cool running



● suitable



Origin		Size	PR	LI/ SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)	(lbs)	(kPa)	(PSI)			
•	•	385/65R22.5	20	160	K	11.75	4500 9920	900 130	15.5	1072	389	
•	•	385/65R22.5	24	164	K	11.75	5000 11000	930 135	15.5	1072	389	
•		425/65R22.5	20	165	K	12.25	5150 11400	830 120	16.5	1124	422	

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
CN	VN					(kgs)		(lbs)		(kPa)		(PSI)				
		S	D	S	D	S	D	S	D	S	D					
•		11.00R20	18	152/149	K	8.00	3550 3250	7830 7160	930 930	135 135	16	1085	293			

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD218

ON & OFF ROAD DRIVE

Suitable Conditions

Medium and Short mileage vehicles running on paved and unpaved roads



- Excellent traction
- High scrub resistance
- Cut resistant



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	<i>NEW</i> 9.5R17.5	18	143/141 K	6.75	2725	2575	6005	5675	875	875	125	125	17	850	240
•	11R22.5	16	148/145 L	8.25	3150	2900	6640	6395	850	850	123	123	22.5	1059	279
•	<i>NEW</i> 12R22.5	18	152/149 K	9.00	3550	3250	7830	7160	930	930	135	135	21	1096	300
•	<i>NEW</i> 225/80R17.5	18	123/122 L	6.75	1550	1500	3415	3305	700	700	102	102	14	811	226
•	<i>NEW</i> 265/70R19.5	18	143/141 K	7.50	2725	2575	6005	5675	900	900	130	130	15	867	262
•	<i>NEW</i> 275/70R22.5	18	148/145 M	8.25	3150	2900	6940	6395	900	900	130	130	17	958	276
•	<i>NEW</i> 295/80R22.5	18	152/149 L	9.00	3550	3250	7825	7165	900	900	130	130	17	1044	298
•	<i>NEW</i> 325/95R24	22	162/160 K	9.00	4750	4500	10500	9920	850	850	123	123	16	1228	325

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD210

Suitable Conditions

Medium and Short mileage vehicles running on paved and unpaved roads



- ✓ Excellent traction
- ✓ Excellent durability
- ✓ Tread chunking resistance



● suitable



BD280

Suitable Conditions

Dump truck tire drive position tire used for medium and short distances on mixed road surfaces



- ✓ Excellent durability
- ✓ High strength
- ✓ Excellent grip



● suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
• •	12R22.5	18	152/149	K	9.00	3550	3250	7825	7165	930	930	135	135	20.5	1096	300
•	13R22.5	18	154/151	K	9.75	3750	3450	8270	7605	830	830	120	120	22	1124	320
•	13R22.5	20	156/150	J	9.75	4000	3350	8820	7390	900	900	130	130	22.5	1124	320
•	315/80R22.5	20	156/153	K	9.00	4000	3650	8820	8045	850	850	125	125	22	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
• •	11R22.5	16	148/145	K	8.25	3150	2900	6945	6395	840	840	120	120	19	1059	279
• •	12R22.5	18	152/149	K	9.00	3550	3250	7825	7165	930	930	135	135	20.5	1096	300
• •	13R22.5	20	156/150	J	9.75	4000	3350	8820	7390	900	900	130	130	20	1124	320
•	295/80R22.5	18	152/149	K	9.00	3550	3250	7825	7165	900	900	130	130	18	1044	298
•	315/80R22.5	20	156/150	K	9.00	4000	3350	8820	7390	850	850	125	125	21	1076	312
• •	315/80R22.5	20	156/153	K	9.00	4000	3650	8820	8045	850	850	125	125	20.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD260

Suitable Conditions

Medium and Short mileage vehicles running on paved and unpaved roads



- Excellent traction
- Tread chunking resistance
- Cut resistant



 suitable



BD216


Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Excellent traction
- High scrub resistance
- Cut resistant



 suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	7.00R16LT	14	118/114 L	5.50F	1320	1180	2910	2600	770	770	110	110	14	785	200
•	7.50R16LT	14	122/118 L	6.00G	1500	1320	3310	2910	770	770	110	110	16	815	215
•	8.25R16LT	16	128/124 K	6.50H	1800	1600	3970	3530	770	770	110	110	16	865	235
•	8.25R20	16	139/137 K	6.50	2430	2300	5360	5070	930	930	135	135	17.5	974	236

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	146/143 K	8.25	3000	2725	6610	6005	830	830	120	120	24.5	1059	279
•	11R24.5	16	149/146 K	8.25	3250	3000	7160	6610	830	830	120	120	24.5	1110	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BLG19

Suitable Conditions

Medium and Short mileage vehicles running on paved and unpaved roads



- ☑ Excellent traction
- ☑ High scrub resistance
- ☑ Cut resistant



● suitable



ALL-POSITION



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
●	9.5R17.5	18	143/141	K	6.75	2725	2575	6005	5675	875	875	125	125	17	850	240
●	265/70R19.5	18	143/141	K	7.50	2725	2575	6005	5675	900	900	130	130	15	867	262
●	325/95R24	20	160/157	K	9.00	4500	4125	9920	9090	900	900	130	130	20	1228	325
●	8.25R16LT	16	128/124	L	6.50H	1800	1600	3970	3530	770	770	110	110	15.5	865	235
●	10.00R20	18	149/146	K	7.50	3250	3000	7160	6610	930	930	135	135	19	1065	278
●	11.00R20	18	152/149	K	8.00	3550	3250	7830	7170	930	930	135	135	20	1096	293
●	12.00R20	18	154/151	K	8.50	3750	3450	8270	7610	970	970	120	120	21	1136	315
●	12.00R20	20	156/153	K	8.50	4000	3650	8820	8820	900	900	130	130	21	1136	315
●	8.25R20	16	139/137	K	6.50	2430	2300	5360	5070	930	930	135	135	17	974	236
●	9.00R20	16	144/142	K	7.00	2800	2650	6170	5840	900	900	130	130	18	1030	259
●	12.00R24	20	160/157	K	8.50	4500	4125	9920	9090	900	900	130	130	20	1238	315
●	12.00R24	22	162/160	K	8.50	4750	4500	10470	9920	900	900	130	130	20	1238	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG~2.2lbs

BA267

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Cool running
- Excellent durability



 suitable



BA226


Suitable Conditions

Medium and short mileage vehicles running on paved and unpaved roads



- Cool running
- Excellent durability



 suitable



Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	275/80R22.5	18	149/146	L	8.25	3250	3000	7160	6610	900	900	130	130	18.5	1012	276
•	295/80R22.5	18	152/149	L	9.00	3550	3250	7825	6945	900	900	130	130	18	1044	298
•	265/70R19.5	18	143/141	J	7.50	2725	2575	6005	5675	900	900	130	130	15.5	867	262

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin		Size	PR	LI/SS	Standard Rim	Max. Load		Pressure		Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
CN	VN					(kgs)	(lbs)	(kPa)	(PSI)				
•	•					385/65R22.5	24	164	K				11.75
•	•	425/65R22.5	20	165	K	12.25	5150	11400	830	120	17.5	1124	422
•	•	445/65R22.5	20	169	K	13.00	5800	12800	900	130	17.5	1150	444

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BA111

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Long tread life
- Great high speed stability



● suitable



BA115

Suitable Conditions

Medium and Short mileage vehicles running on paved and unpaved roads



- Cool running
- Excellent durability



● suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	6.50R16LT	12	110/105 L	5.50F	1060	925	2335	2040	670	670	97	97	10.5	750	185
•	7.00R16LT	14	118/114 L	5.50F	1320	1180	2910	2600	770	770	110	110	11.5	775	205
• •	7.50R16LT	14	122/118 L	6.00G	1500	1320	3310	2910	770	770	110	110	12.5	805	215
•	8.25R16LT	16	128/124 L	6.50H	1800	1600	3970	3530	770	770	110	110	12.5	855	235

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	7.00R16LT	14	118/114 L	5.50F	1320	1180	2910	2600	770	770	110	110	12	785	200
•	7.50R16LT	14	122/118 L	6.00G	1500	1320	3310	2910	770	770	110	110	13	815	215
•	8.25R16LT	16	128/124 L	6.50H	1800	1600	3970	3530	770	770	110	110	13	855	235
•	8.25R20	16	139/137 K	6.50	2430	2300	5360	5070	930	930	135	135	14	974	236

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BLR01

Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads



- Cool running
- Excellent durability



● suitable



BA122

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- Excellent durability
- Cool running
- Long tread life



● suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	146/143 M	8.25	3000	2725	6610	6005	830	830	120	120	16	1054	279
•	11R22.5	16	148/145 M	8.25	3150	2900	6945	6395	840	840	120	120	16	1054	279
•	12R22.5	18	152/148 K	9.00	3550	3150	7825	6945	850	850	125	125	16.5	1085	300
•	13R22.5	18	154/150 L	9.75	3750	3350	8270	7390	850	850	125	125	16	1124	320
•	11R24.5	16	149/146 L	8.25	3250	3000	7160	6610	830	830	120	120	16	1104	279
•	11R24.5	16	149/146 M	8.25	3250	3000	7160	6610	830	830	120	120	16	1104	279
•	295/80R22.5	18	152/149 L	9.00	3550	3250	7825	7165	900	900	130	130	17.5	1044	298
•	315/80R22.5	20	156/153 K	9.00	4000	3650	8820	8045	850	850	125	125	14	1076	312
•	325/95R24	22	162/160 K	9.00	4750	4500	10500	9920	850	850	123	123	15.5	1228	325
•	7.00R16LT	14	118/114 L	5.50F	1320	1180	2910	2600	770	770	110	110	11.5	775	205
•	7.50R16LT	14	122/118 L	6.00G	1500	1320	3310	2910	770	770	110	110	12.5	805	215
•	8.25R16LT	14	126/122 L	6.50H	1700	1500	3750	3310	670	670	97	97	12.5	855	235
•	8.25R16LT	16	128/124 L	6.50H	1800	1600	3970	3530	770	770	110	110	12.5	855	235
•	10.00R20	16	146/143 K	7.50	3000	2725	6610	6005	830	830	120	120	16	1054	278
•	10.00R20	18	149/146 K	7.50	3250	3000	7160	6610	930	930	135	135	16	1054	278
•	11.00R20	16	150/147 K	8.00	3350	3075	7390	6780	830	830	120	120	16.5	1085	293
•	11.00R20	18	152/149 K	8.00	3550	3250	7830	7160	930	930	135	135	16.5	1085	293
•	12.00R20	18	154/151 K	8.50	3750	3450	8270	7610	830	830	120	120	17	1125	315
•	9.00R20	16	144/142 K	7.00	2800	2650	6170	5840	900	900	130	130	15	1019	259
•	12.00R24	20	160/157 K	8.50	4500	4125	9920	9090	900	900	130	130	15.5	1226	315

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	146/143 L	8.25	3000	2725	6610	6010	830	830	120	120	18	1054	279
•	12R22.5	18	152/149 L	9.00	3550	3250	7825	7165	930	930	135	135	18	1085	300
•	13R22.5	18	154/151 K	9.75	3750	3450	8270	7605	830	830	120	120	18	1124	320
•	275/70R22.5	18	148/145 K	8.25	3150	2900	6940	6395	900	900	130	130	17	958	276
•	295/80R22.5	18	152/149 M	9.00	3550	3250	7825	7165	900	900	130	130	17.5	1044	298
•	315/80R22.5	20	156/153 L	9.00	4000	3650	8820	8045	850	850	125	125	17	1076	312

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BA125

Suitable Conditions

Medium and long mileage trucks running on paved roads and highways



- High wear resistance
- Low noise emissions
- Long tread life
- Cool running



 suitable



BA220


Suitable Conditions

Medium and long mileage trucks running on paved and unpaved roads



- Cool running
- Excellent durability



 suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	12R22.5	18	152/149 L	9.00	3550	3250	7825	7165	930	930	135	135	15.5	1085	300
•	10.00R20	18	149/146 K	7.50	3250	3000	7165	6610	930	930	135	135	15	1054	278
•	11.00R20	16	150/147 K	8.00	3350	3075	7390	6780	830	830	120	120	15.5	1085	293
•	11.00R20	18	152/149 K	8.00	3550	3250	7830	7170	930	930	135	135	15.5	1085	293
•	12.00R20	18	154/151 K	8.50	3750	3450	8270	7610	830	830	120	120	16	1125	315
•	12.00R20	20	156/153 K	8.50	4000	3650	8820	8820	900	900	130	130	16	1125	315

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
• •	11R22.5	16	146/143 K	8.25	3000	2725	6610	6005	830	830	120	120	17.5	1054	279
• •	11R22.5	16	148/145 L	8.25	3150	2900	6940	6395	850	850	123	123	17.5	1054	279
• •	12R22.5	18	152/149 K	9.00	3550	3250	7825	7165	930	930	135	135	18.5	1085	300
•	13R22.5	18	154/151 K	9.75	3750	3450	8270	7610	830	830	120	120	18	1124	320
• •	13R22.5	20	156/150 K	9.75	4000	3350	8820	7390	900	900	130	130	18	1124	320
•	11R24.5	14	146/143 K	8.25	3000	2725	6610	6005	720	720	105	105	17.5	1104	279
•	11R24.5	16	149/146 K	8.25	3250	3000	7160	6610	830	830	120	120	17.5	1104	279
•	295/80R22.5	18	152/149 K	9.00	3550	3250	7825	6945	900	900	130	130	18	1044	298
•	315/80R22.5	20	156/153 K	9.00	4000	3650	8820	8050	850	850	125	125	17	1076	312

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BA106

Suitable Conditions

Medium and long mileage vehicles running on paved roads



- High scrub resistance
- Cut resistant



 suitable



BA127


Suitable Conditions

Medium and short mileage vehicles running on paved and unpaved roads



- Cool running
- Excellent durability



 suitable



Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
CN VN	• 325/95R24	22	162/160 K	9.00	4750	4500	10470	9920	900	900	130	130	14.5	1228	325
	• 12.00R24	20	160/157 K	8.50	4500	4125	9920	9090	900	900	130	130	14.5	1226	315

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
CN VN	• 325/95R24	22	162/160 K	9.00	4750	4500	10500	9920	850	850	123	123	15.5	1228	325

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BA105

Suitable Conditions

Medium and Short mileage vehicles running on paved and unpaved roads



- Tread chunking resistance
- Cut resistant



 suitable



OFF ROAD

Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	325/95R24	22	162/160	K	9.00	4750	4500	10500	9920	850	850	123	123	16	1228	325
•	12.00R24	20	160/157	K	8.50	4500	4125	9920	9090	900	900	130	130	16	1226	315

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD285

Suitable Conditions

Short mileage vehicles running on unpaved roads



- Impact-resistant
- High durability
- Reduce stone retention



suitable



BD189

Suitable Conditions

Short mileage vehicles running on unpaved roads



- Excellent traction
- High scrub resistance



suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	7.50R16LT	14	122/118 D	6.00G	1500	1320	3310	2910	770	770	110	110	18.5	816	215
•	8.25R16LT	16	128/124 D	6.50H	1800	1600	3970	3530	770	770	110	110	20	865	235
•	10.00R20	18	149/146 D	7.50	3250	3000	7165	6610	930	930	135	135	23.5	1065	278
•	11.00R20	16	150/147 D	8.00	3350	3075	7390	6780	830	830	120	120	24	1096	293
•	12.00R20	22	158/155 D	8.50	4250	3875	9370	8540	970	970	140	140	24	1136	315
•	8.25R20	16	139/137 D	6.50	2430	2300	5360	5070	930	930	135	135	20	974	236
•	9.00R20	16	144/142 D	7.00	2800	2650	6170	5840	900	900	130	130	22	1030	259

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	148/145 G	8.25	3150	2900	6940	6395	850	850	123	123	24	1059	279
•	12R22.5	18	152/149 G	9.00	3550	3250	7830	7160	930	930	135	135	24	1096	300
•	13R22.5	18	156/150 G	9.75	4000	3350	8820	7385	875	875	125	125	24	1124	320
•	11R24.5	16	149/146 G	8.25	3250	3000	7160	6610	830	830	120	120	23.5	1110	279
•	275/70R22.5	16	148/145 J	8.25	3150	2900	6940	6395	900	900	130	130	23.5	958	276
•	295/80R22.5	18	152/149 J	9.00	3550	3250	7830	7160	900	900	130	130	24	1044	298
•	315/80R22.5	20	157/154 G	9.00	4125	3750	9090	8270	900	900	130	130	23.5	1076	312

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BD266

Suitable Conditions

Short mileage vehicles running on unpaved roads



- Excellent traction
- Excellent durability
- High scrub resistance



● suitable



BD270

Suitable Conditions

Short mileage vehicles running on unpaved roads



- Scratch resistant
- Impact resistant
- Excellent durability



● suitable



Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
CN VN	12.00R24	20	160/157 D	8.50	4500	4125	9920	9090	900	900	130	130	31	1238	315

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
CN VN	7.50R16LT	14	122/118 D	6.00G	1500	1320	3310	2910	770	770	110	110	17.5	815	215
CN VN	8.25R16LT	16	128/124 D	6.50H	1800	1600	3970	3530	770	770	110	110	17.5	865	235
CN VN	8.25R20	16	139/137 D	6.50	2430	2300	5360	5070	930	930	135	135	19.5	974	236

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BLM16

Suitable Conditions

Short mileage vehicles running on unpaved roads



- ✓ Excellent traction
- ✓ Tread chunking resistance



● suitable



Origin CN VN	Size	PR	LI/ SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
●	13R22.5	18	154/150	K	9.75	3750	3350	8270	7390	850	850	125	125	21	1124	320
●	13R22.5	20	156/150	J	9.75	4000	3350	8820	7390	900	900	130	130	21	1124	320
●	10.00R20	18	149/146	K	7.50	3250	3000	7160	6610	930	930	135	135	21	1065	278
●	11.00R20	16	150/147	K	8.00	3350	3075	7390	6780	830	830	120	120	21	1096	293
●	11.00R20	18	152/149	K	8.00	3550	3250	7830	7160	930	930	135	135	21	1096	293
●	12.00R20	18	154/151	K	8.50	3750	3450	8270	7610	830	830	120	120	21	1136	315
●	12.00R20	22	158/155	D	8.50	4250	3875	9370	8540	970	970	140	140	21	1136	315
●	12.00R24	20	160/157	K	8.50	4500	4125	9920	9090	900	900	130	130	21.5	1238	315

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BC121

Suitable Conditions



✔ Excellent durability



● suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
●	295/80R22.5	18	152/149	M	9.00	3550	3250	7825	7165	930	930	135	135	15	1044	298

S=Single D=Dual; 1Inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BU123

Suitable Conditions

Short mileage vehicles running on paved roads



- Excellent durability
- High scrub resistance



● suitable



BU551

Suitable Conditions

Short mileage vehicles running on paved roads



- Excellent durability
- High scrub resistance



● suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	11R22.5	16	148/145	J	8.25	3150	2900	6940	6395	850	850	123	123	20	1054	279
• •	275/70R22.5	18	148/145	J	8.25	3150	2900	6940	6395	900	900	130	130	20.5	958	276
•	305/70R22.5	18	152/150	J	9.00	3550	3350	7830	7390	900	900	130	130	20.5	1000	305
•	305/70R22.5	20	153/150	J	9.00	3650	3350	8050	7390	900	900	130	130	20.5	1000	305

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)	
					(kgs)		(lbs)		(kPa)		(PSI)					
					S	D	S	D	S	D	S	D				
•	11R22.5	16	148/145	L	8.25	3150	2900	6940	6395	850	850	123	123	20.5	1054	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

BLC58

Suitable Conditions

Short mileage vehicles running on paved roads



- Excellent durability
- High scrub resistance




● suitable



Origin	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
• CN VN	10R22.5	16	144/142 L	7.50	2800	2650	6175	5840	900	900	130	130	16.5	1020	254

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

WINTER

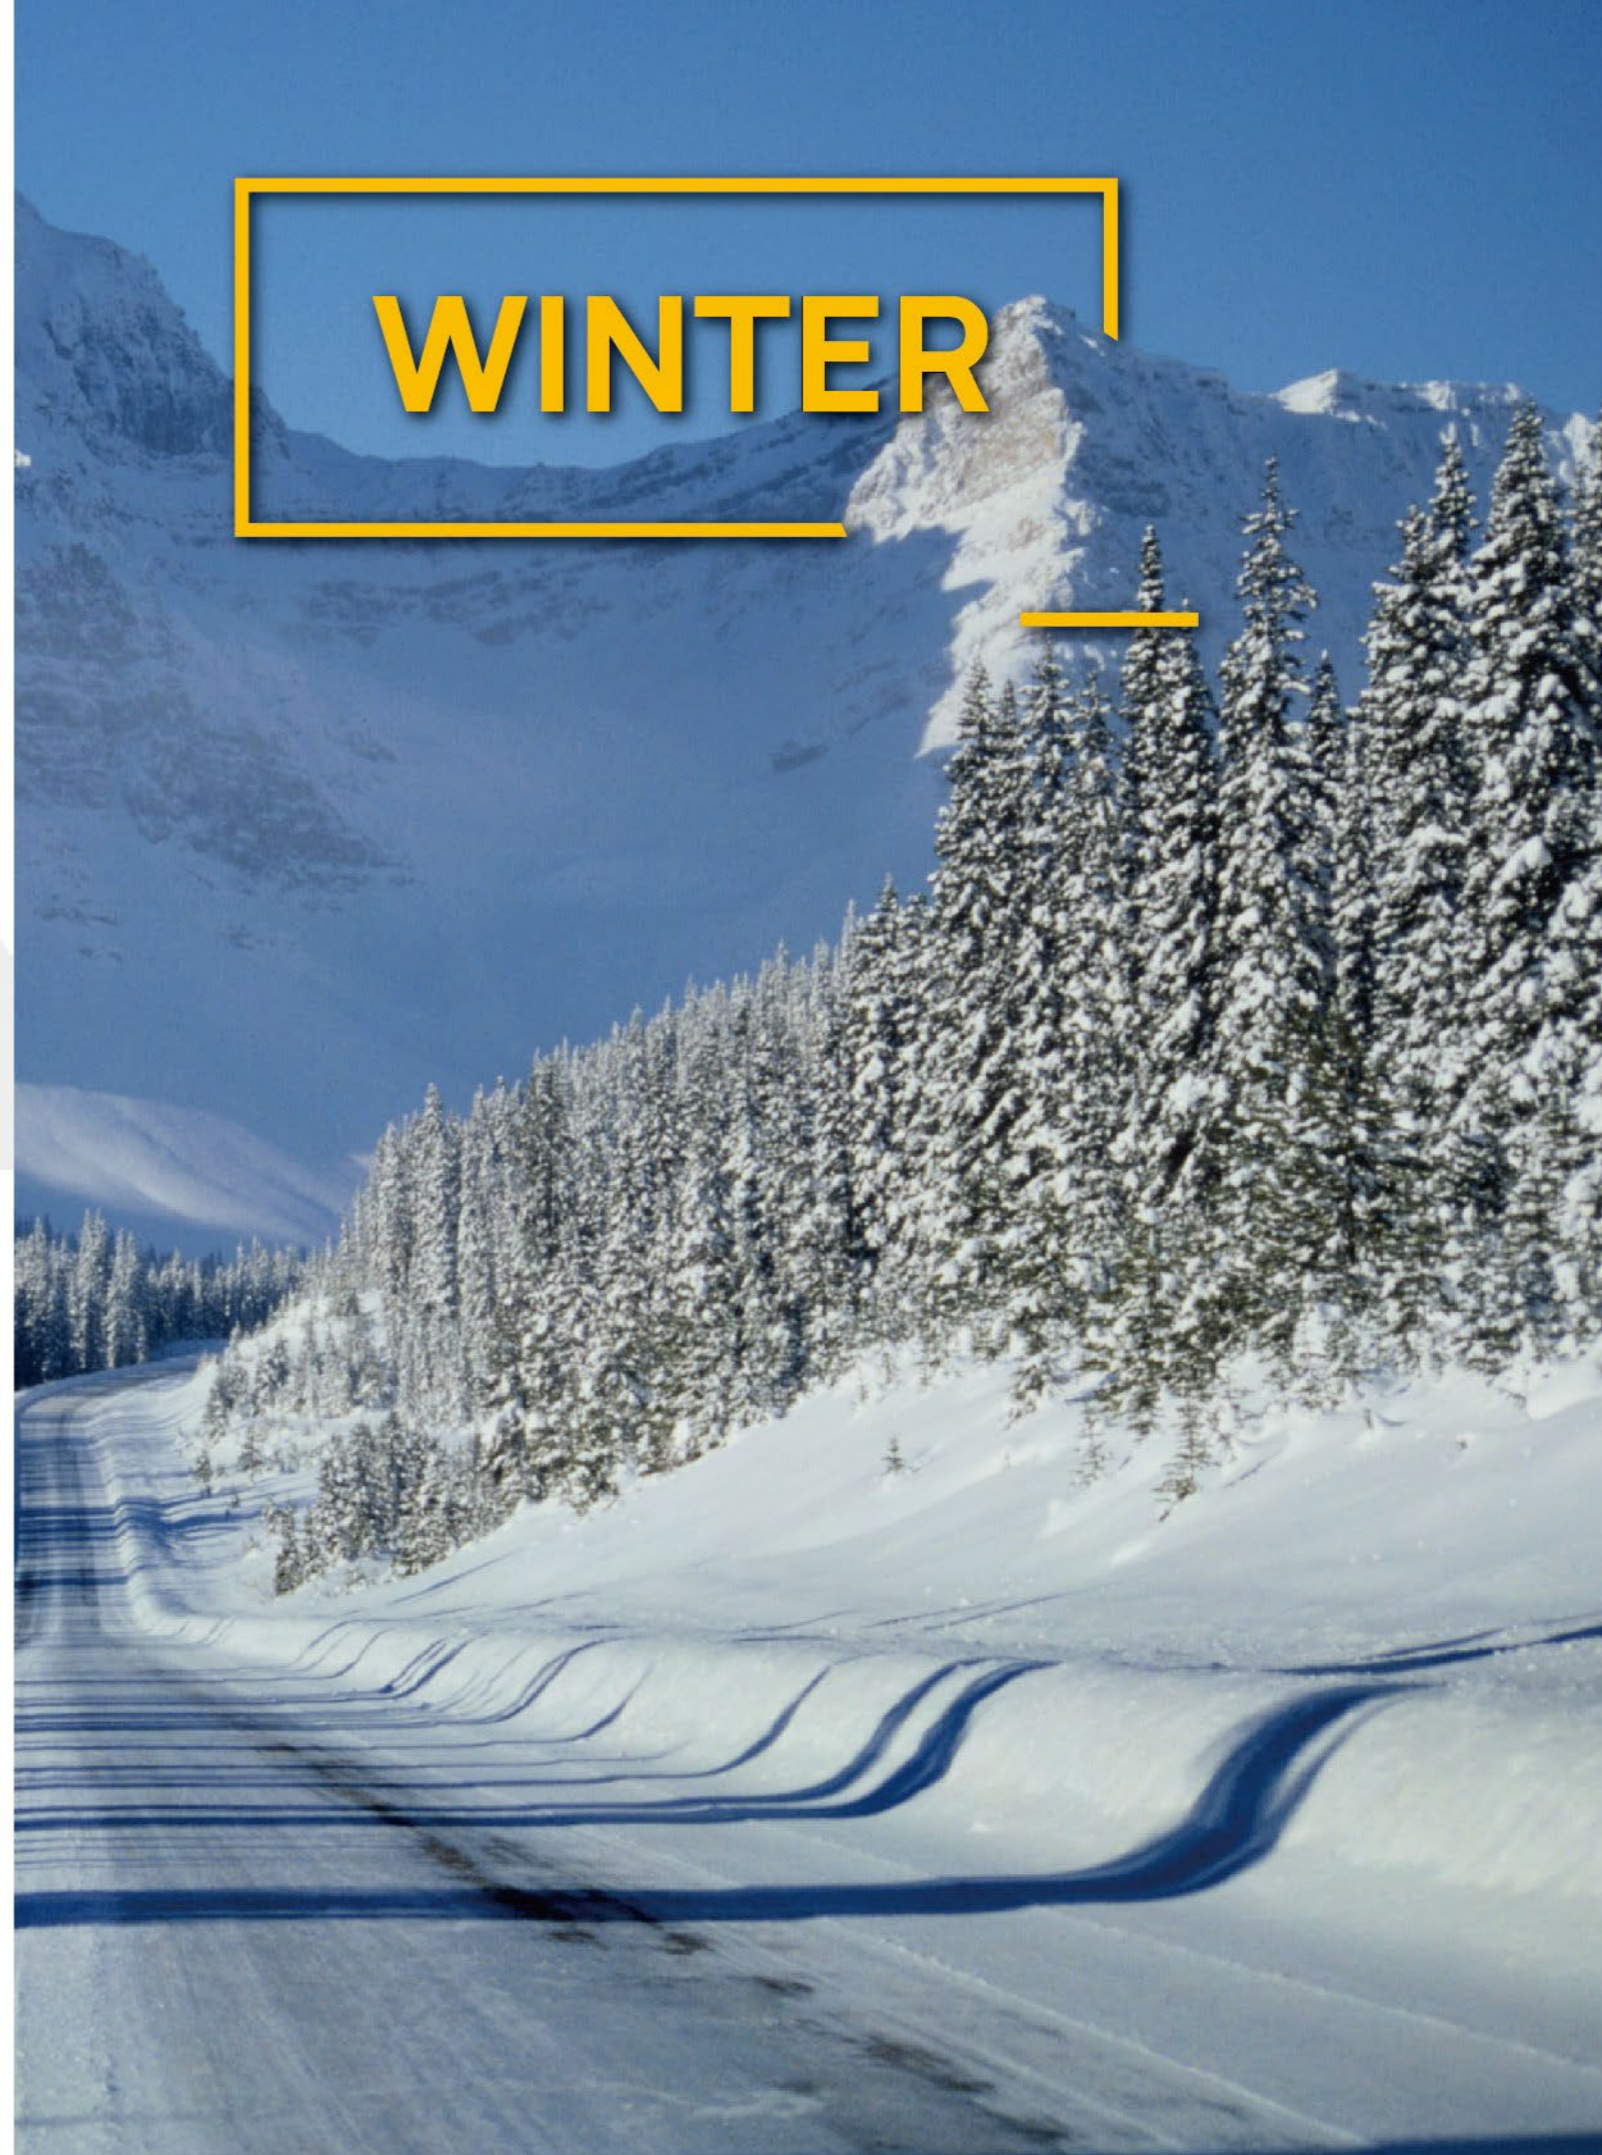

BW290

Suitable Conditions

Medium and long mileage truck running
on paved and highway roads



- Excellent traction
- Good cost-performance



 suitable



BW291


Suitable Conditions

Medium and long mileage truck running
on paved and highway roads



- Excellent traction
- Good cost-performance



 suitable



Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	20	1054	279

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs

Origin CN VN	Size	PR	LI/SS	Standard Rim	Max. Load				Pressure				Tread Depth (mm)	Overall Diameter (mm)	Section Width (mm)
					(kgs)		(lbs)		(kPa)		(PSI)				
					S	D	S	D	S	D	S	D			
•	11R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	20	1054	279
•	225/80R17.5	14	123/122 L	6.75	1550	1500	3415	3305	700	700	102	102	16	811	226
•	225/80R17.5	14	129/127 K	6.75	1850	1750	4080	3860	700	700	102	102	16	811	226
•	245/70R19.5	18	144/142 J	7.50	2800	2650	6175	5840	900	900	130	130	19	839	248
•	265/70R19.5	16	140/138 L	7.50	2500	2360	5510	5205	760	760	110	110	20	867	262
•	275/80R22.5	16	146/143 L	8.25	3000	2725	6610	6005	830	830	120	120	19	1012	276

S=Single D=Dual; 1inch=25.4mm 1kPa=0.142psi 1KG≈2.2lbs